

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F U194V-0







Ordering Information

2263D - 4 XX S XX D Y N X X

No. of Pins per ROW: 42-40PIN
 Contact Plating: G0=Gold Flash, G3=10µ"Gold, G4=15µ"Gold, G5=30µ"Gold, S0=Gold Flash/Tin, S3=10µ"Gold/Tin, S4=15µ"Gold/Tin, S5=30µ"Gold/Tin, SN=Tin, SM=Matte Tin

Insulator: D=L, CP
 Packing: T=Tube, A=Tray

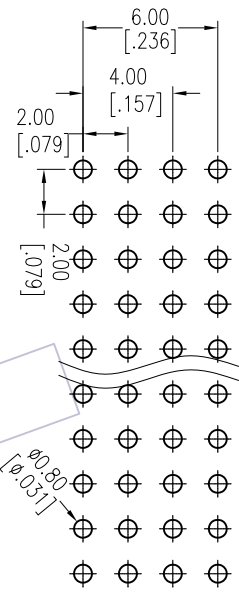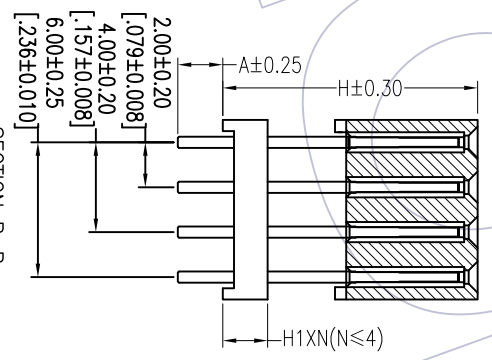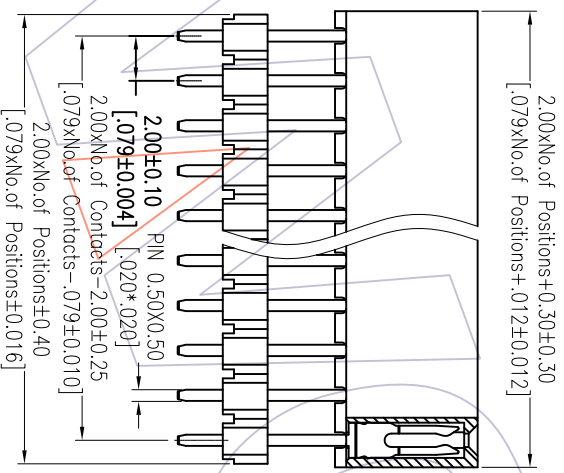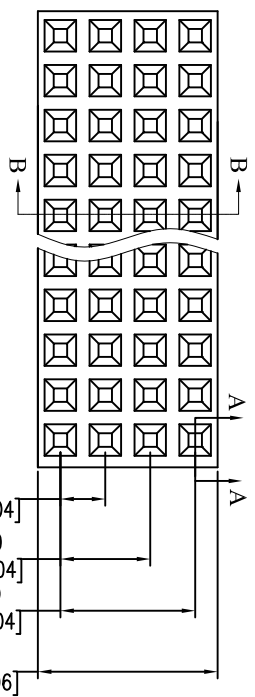

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

SECTION A-A

SECTION B-B

DIMENSION ANTITHESES LIST			
H1XN(N≤4)	A	H	H1
STANDARD	2.28	9.35	1.50
ALTERNATE			

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: FH2. 00mm FOUR ROW 180° DIP H=6.35+H0USTING	Customer NO.
XX	Wang	2013/04/26	UNIT	mm	2263D-4XXSXXDYYNXX		
XX	CHECK	DATE	SIZE	A4			
X.XXX	±0.15		SHEET	1/1			
Angle	± 3'	DATE	PROJ.				
APPROVE							
CHANGE							
DMW	TOL						
MODIFICATION DESCRIPTION							
DATE							
NEW							
Modify drawing							
2013/04/26							
2012/12/07							
REV	DATE						

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com