

HSF

TECHNICAL SPECS:


Current Rating: 3.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3 (C36000)
 Connecting Pin: Ø0.47mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F. (UL94V-0)

Ordering Information

3512-281 XX R XX 118 X 1

No. of Pin: 2-40PIN
 Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 SN=Tm
 Packing:
 A=Tray
 T=Tube

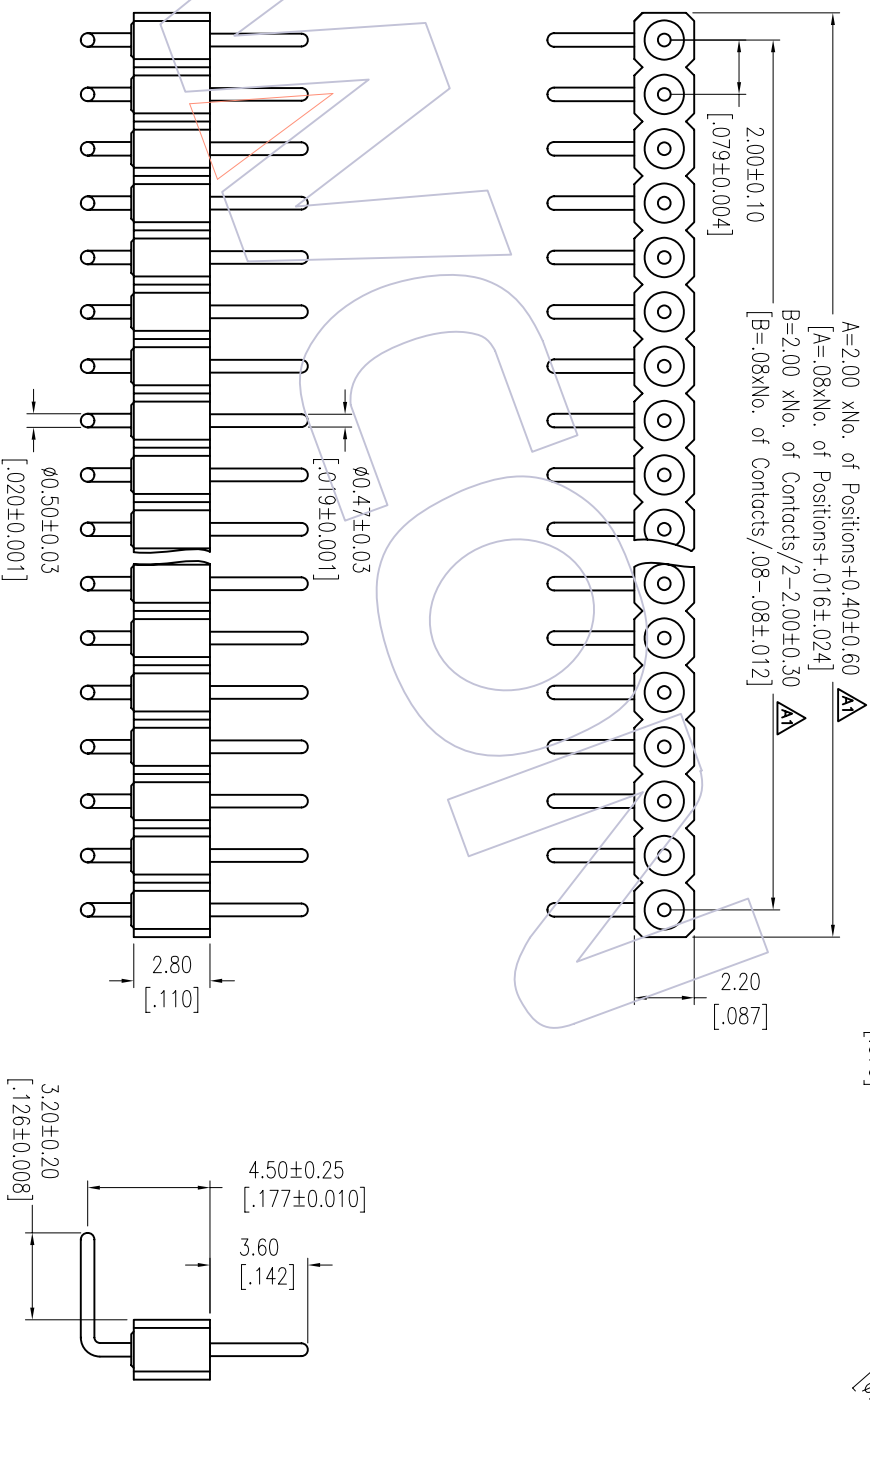

OPERATION	DATE	SCALE	FIT	PART NO.	TITLE:
X.X	2012/01/03	UNIT	mm	3512-281XXRXX118X1	
CHECK	CHECK	SIZE	A4	2.00mm MACHINED PIN HEADER SINGLE ROW 90° H=2.80 L=11.8	
X.XXX	±0.25	SHEET	1/1	Customer NO.	
Angle	±0.15	PROJ.			
APPROVE	DATE				
CHANGE	DATE				
MODIFICATION DESCRIPTION					
NEW					
Modify drawing					
12/01/03					
A1					
09/02/26					
A0					
REV	DATE				

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: wconks@wcon.com