

HSF



NOTES:

- Current Rating: 1.0A
- Voltage Rating: 100V AC,DC
- Contact Resistance: 20mΩ max
- Withstand Voltage: 800V AC/minute
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -25°C to +85°C
- Contact Material: Brass
- Contact plating: Au or Sn Over Ni
- Insulator Material: PA6T+30%G.F.(UL94V-0)

Ordering Information

WF2001 - WZ XX XX T I

- No. of pins 02~16P
- Contact Plating S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold Blank=Tin
- Color B=Black E=Beige W=White T=Natural
- Packaging 0=PE Bag T=Tube R=Reel

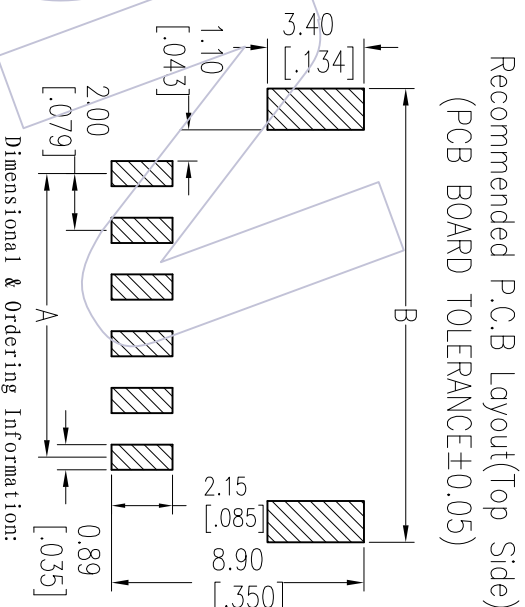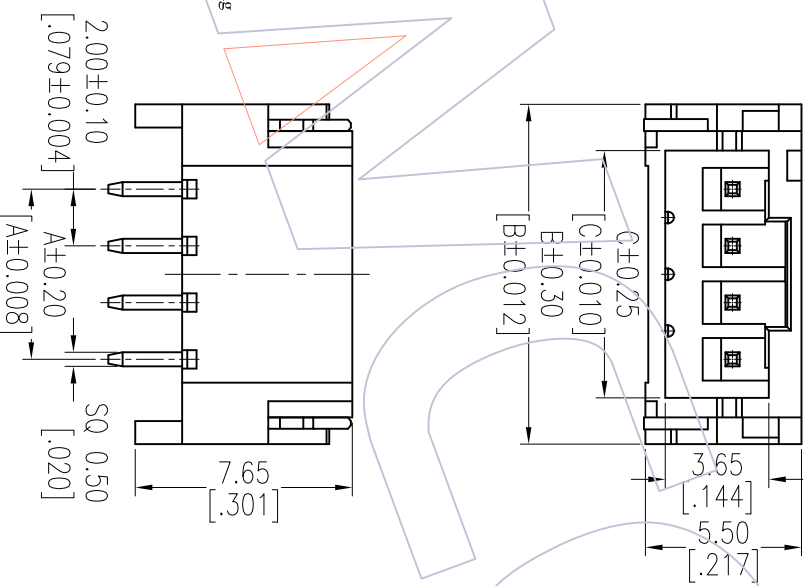

Dimensional & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF2001-WZ02X01	2.0	8.0	4.72
03	WF2001-WZ03X01	4.0	10.0	6.72
04	WF2001-WZ04X01	6.0	12.0	8.72
05	WF2001-WZ05X01	8.0	14.0	10.72
06	WF2001-WZ06X01	10.0	16.0	12.72
07	WF2001-WZ07X01	12.0	18.0	14.72
08	WF2001-WZ08X01	14.0	20.0	16.72
09	WF2001-WZ09X01	16.0	22.0	18.72
10	WF2001-WZ10X01	18.0	24.0	20.72
11	WF2001-WZ11X01	20.0	26.0	22.72
12	WF2001-WZ12X01	22.0	28.0	24.72
13	WF2001-WZ13X01	24.0	30.0	26.72
14	WF2001-WZ14X01	26.0	32.0	28.72
15	WF2001-WZ15X01	28.0	34.0	30.72
16	WF2001-WZ16X01	30.0	36.0	32.72

OPERATION	DRAW	DATE	SCALE	PART NO.
XX	JYHuang	2012/08/25	UNIT	SEE TABLE
±0.40	CHECK	DATE	mm	
±0.25	APPROVE	DATE	A4	
±0.15	DATE	DATE	1/1	
Angle	APPROVE	DATE	PROJ.	Customer NO.
± 3'	DATE	DATE		
DIM	TOL			
CHANGE				

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com